

Mood 12 G3

Gain 45 dB



PRODUCT FEATURES

- Receiver-in-Canal hearing system (RIC) with 45-dB-receiver and battery size 312
- For open and closed fitting

BASIC FEATURES

- Dual Energy Technology: optionally usable with rechargeable battery* or battery
- Battery compartment as on/off switch
- Rocker switch, can be programmed as a program button, on/off switch, volume control, tone control
- Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, volume control, on/off function
- Telephone coil
- Personal-Color-Concept
- Audiomatic power-on delay (P) (activate/deactivate)
- IP67 certified

TECHNICAL FEATURES

- 32 Signal processing channels / 16 frequency channels
- 16 AGC channels / 16 MPO channels
- 6 Hearing programs
- Data Logging
- Wireless
 - Binaural synchronisation
 - AudioLink
 - Remote control optional
 - Wireless audio input optional

SIGNAL PROCESSING

- Anti-Feedback-System G3
- Noise Manager
 - Adaptive noise reduction
 - Wiener filter
 - Adaptive wind noise reduction
 - Impulse suppressor
 - Auto-situation adaption
 - Selectronic
- AudioTronic multi-microphone system
 - Panorama
 - Directional static
 - Automatic
 - Adaptive
 - Speech 360
 - AudioSpot (Basic functionality)
- Frequency and dynamics concept
 - TRC S
 - Selective frequency compression
 - Sound Upgrade (in wireless audio input mode)

AUTOMATIC FUNCTIONS

- Intelligent Acclimatic
- Comformatic

OPTIONS

- Smart Power*
- Smart Connect
- Smart Connect App
- Smart Remote
- Smart Remote App
- External receiver M with FOG = 60 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- External receiver P with FOG = 70 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- Customised CLIC MOULD 2.0 (Open or Power)
- Click Domes (Open, Semi-open, Closed or Double)
- AutoPhone Set

PROGRAMMING ADAPTER


- Adapter 312

Art.-No. 108 24 469

HOUSING COLORS

	Beige		Dark Grey		Black
	Tobacco		Silver		Bronze
	Grey		Pearly-White		

FITTING RANGE



* = We recommend using rechargeable batteries only with the 45 dB receiver and up to a maximum of 12 hours wear per day.

P = Patent

Mood 12 G3

Gain 45 dB




MAXIMUM OUTPUT

Input = 90 dB

MAXIMUM GAIN

Input = 50 dB

TECHNICAL INFORMATION

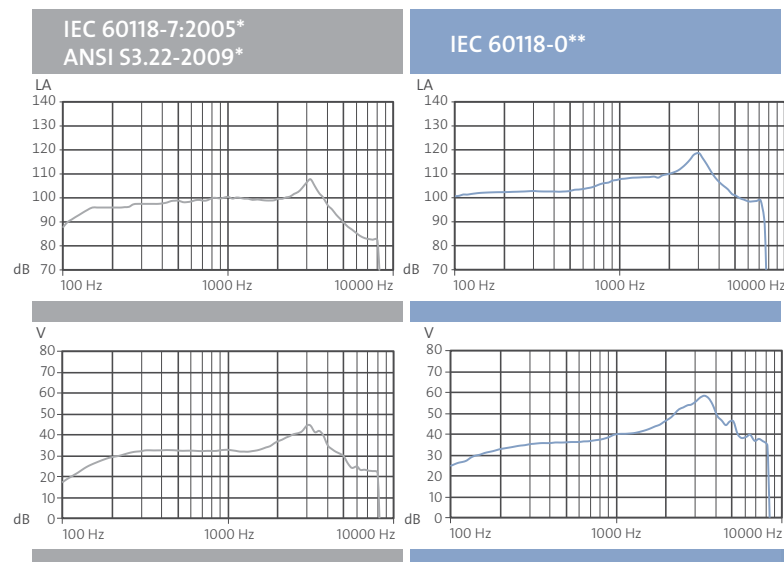

SATURATION OSPL 90		
Peak value at 90 dB	108 dB	118 dB
1.600 Hz (RTF)	99 dB	109 dB
HFA (High Frequency Average)	100 dB	107 dB
FULL ON GAIN		
Peak value at 50 dB	45 dB	57 dB
1.600 Hz	33 dB	42 dB
HFA (High Frequency Average)	36 dB	40 dB
Reference test gain	21 dB	35 dB
TECHNICAL FEATURES		
Battery size	312	312
Battery life	124 Hours	124 Hours
Frequency response	100 – 8.200 Hz	100 – 8.300 Hz
Battery current consumption	0,90 mA	0,90 mA
Equivalent noise level	18 dB	22 dB
Telecoil sensitivity, measured in 1 mA/M	64 dB	75 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	1%
1.600 Hz	1%	2%

* Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2ccm coupler

** Technical data measured in accordance with IEC 60118-0 at ear simulator coupler



WARNING

Small parts present a choking hazard.

This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connexx 7.4 and AudioFit 7.4 or higher.

Audio Service GmbH · Zeppelinstraße 9 · D-32051 Herford

Fon +49 5221 3807-0 · Fax +49 5221 3807-90 · info@audioservice.com · www.audioservice.com

Mood 12 G3

Gain 60 dB



PRODUCT FEATURES

- Receiver-in-Canal hearing system (RIC) with 60-dB-receiver and battery size 312
- For open and closed fitting

BASIC FEATURES

- Dual Energy Technology: optionally usable with rechargeable battery* or battery
- Battery compartment as on/off switch
- Rocker switch, can be programmed as a program button, on/off switch, volume control, tone control
- Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, volume control, on/off function
- Telephone coil
- Personal-Color-Concept
- Audiomatic power-on delay (P) (activate/deactivate)
- IP67 certified

TECHNICAL FEATURES

- 32 Signal processing channels / 16 frequency channels
- 16 AGC channels / 16 MPO channels
- 6 Hearing programs
- Data Logging
- Wireless
 - Binaural synchronisation
 - AudioLink
 - Remote control optional
 - Wireless audio input optional

SIGNAL PROCESSING

- Anti-Feedback-System G3
- Noise Manager
 - Adaptive noise reduction
 - Wiener filter
 - Adaptive wind noise reduction
 - Impulse suppressor
 - Auto-situation adaption
 - Selectronic
- AudioTronic multi-microphone system
 - Panorama
 - Directional static
 - Automatic
 - Adaptive
 - Speech 360
 - AudioSpot (Basic functionality)
- Frequency and dynamics concept
 - TRC S
 - Selective frequency compression
 - Sound Upgrade (in wireless audio input mode)

AUTOMATIC FUNCTIONS

- Intelligent Acclimatic
- Comformatic

OPTIONS

- Smart Power*
- Smart Connect
- Smart Connect App
- Smart Remote
- Smart Remote App
- External receiver S with FOG = 45 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- External receiver P with FOG = 70 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- Customised CLIC MOULD 2.0 (Open or Power)
- Click Domes (Open, Semi-open, Closed or Double)
- AutoPhone Set

PROGRAMMING ADAPTER


- Adapter 312

Art.-No. 108 24 469

HOUSING COLORS

	Beige		Dark Grey		Black
	Tobacco		Silver		Bronze
	Grey		Pearly-White		

FITTING RANGE

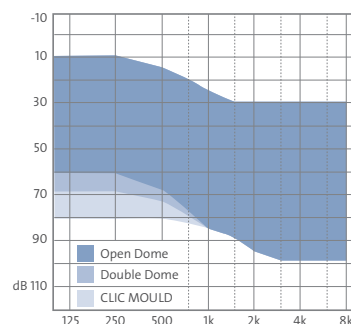

* = We recommend using rechargeable batteries only with the 45 dB receiver and up to a maximum of 12 hours wear per day.

P = Patent

Mood 12 G3

Gain 60 dB




MAXIMUM OUTPUT

Input = 90 dB

MAXIMUM GAIN

Input = 50 dB

TECHNICAL INFORMATION

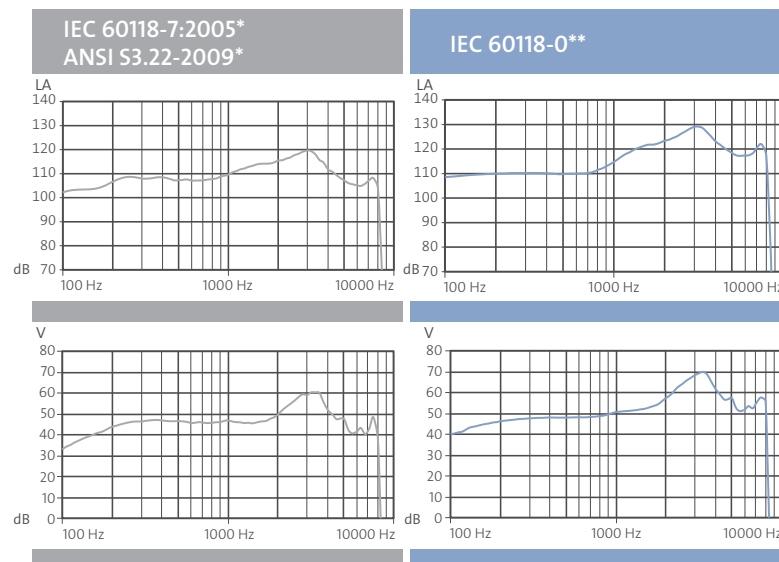

SATURATION OSPL 90

Peak value at 90 dB	119 dB	129 dB
1.600 Hz (RTF)	113 dB	122 dB
HFA (High Frequency Average)	113 dB	116 dB

FULL ON GAIN

Peak value at 50 dB	60 dB	70 dB
1.600 Hz	46 dB	53 dB
HFA (High Frequency Average)	50 dB	52 dB
Reference test gain	36 dB	46 dB

TECHNICAL FEATURES

Battery size	312	312
Battery life	112 Hours	112 Hours
Frequency response	100 – 8.200 Hz	100 – 8.300 Hz
Battery current consumption	1,00 mA	1,00 mA
Equivalent noise level	19 dB	23 dB
Telecoil sensitivity, measured in 1 mA/M	80 dB	85 dB
Distortion		
500 Hz	1%	1%
800 Hz	1%	3%
1.600 Hz	2%	3%

* Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2ccm coupler

** Technical data measured in accordance with IEC 60118-0 at ear simulator coupler



WARNING

Small parts present a choking hazard.

This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connexx 7.4 and AudioFit 7.4 or higher.

Audio Service GmbH · Zeppelinstraße 9 · D-32051 Herford

Fon +49 5221 3807-0 · Fax +49 5221 3807-90 · info@audioservice.com · www.audioservice.com

Mood 12 G3

Gain 70 dB**



PRODUCT FEATURES

- Receiver-in-Canal hearing system (RIC) with 70-dB-receiver and battery size 312
- For open and closed fitting

BASIC FEATURES

- Dual Energy Technology: optionally usable with rechargeable battery* or battery
- Battery compartment as on/off switch
- Rocker switch, can be programmed as a program button, on/off switch, volume control, tone control
- Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, volume control, on/off function
- Telephone coil
- Personal-Color-Concept
- Audiomatic power-on delay (P) (activate/deactivate)
- IP67 certified

TECHNICAL FEATURES

- 32 Signal processing channels / 16 frequency channels
- 16 AGC channels / 16 MPO channels
- 6 Hearing programs
- Data Logging
- Wireless
 - Binaural synchronisation
 - AudioLink
 - Remote control optional
 - Wireless audio input optional

SIGNAL PROCESSING

- Anti-Feedback-System G3
- Noise Manager
 - Adaptive noise reduction
 - Wiener filter
 - Adaptive wind noise reduction
 - Impulse suppressor
 - Auto-situation adaption
 - Selectronic
- AudioTronic multi-microphone system
 - Panorama
 - Directional static
 - Automatic
 - Adaptive
 - Speech 360
 - AudioSpot (Basic functionality)
- Frequency and dynamics concept
 - TRC S
 - Selective frequency compression
 - Sound Upgrade (in wireless audio input mode)

AUTOMATIC FUNCTIONS

- Intelligent Acclimatic
- Comformatic

OPTIONS

- Smart Power*
- Smart Connect
- Smart Connect App
- Smart Remote
- Smart Remote App
- External receiver S with FOG = 45 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- External receiver M with FOG = 60 dB
(IEC 60118-7:2005, ANSI S3.22-2009)
- Customised CLIC MOULD 2.0 (Open or Power)
- Click Domes (Open, Semi-open, Closed or Double)
- AutoPhone Set

PROGRAMMING ADAPTER


- Adapter 312

Art.-No. 108 24 469

HOUSING COLORS

	Beige		Dark Grey		Black
	Tobacco		Silver		Bronze
	Grey		Pearly-White		

FITTING RANGE



* = We recommend using rechargeable batteries only with the 45 dB receiver and up to a maximum of 12 hours wear per day.

** = 70 dB measured with CLIC MOULD 2.0, values vary if domes are used for fitting

P = Patent

Mood 12 G3

Gain 70 dB




MAXIMUM OUTPUT

Input = 90 dB

MAXIMUM GAIN

Input = 50 dB

TECHNICAL INFORMATION

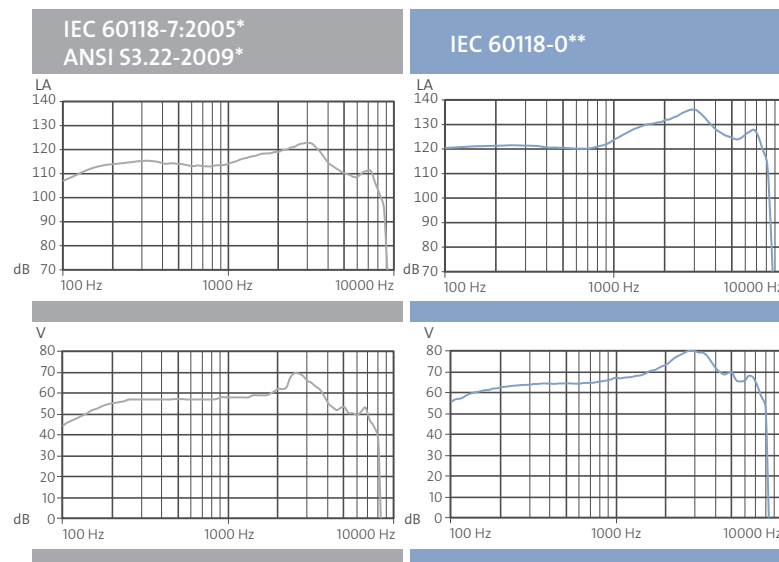

SATURATION OSPL 90		
Peak value at 90 dB	123 dB	136 dB
1.600 Hz (RTF)	118 dB	130 dB
HFA (High Frequency Average)	118 dB	125 dB
FULL ON GAIN		
Peak value at 50 dB	70 dB	80 dB
1.600 Hz	58 dB	70 dB
HFA (High Frequency Average)	62 dB	68 dB
Reference test gain	41 dB	55 dB
TECHNICAL FEATURES		
Battery size	312	312
Battery life	112 Hours	112 Hours
Frequency response	100 – 7.800 Hz	100 – 7.800 Hz
Battery current consumption	1,00 mA	1,00 mA
Equivalent noise level	18 dB	21 dB
Telecoil sensitivity, measured in 1 mA/M	91 dB	100 dB
Distortion		
500 Hz	2%	3%
800 Hz	2%	3%
1.600 Hz	1%	2%

* Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2ccm coupler

** Technical data measured in accordance with IEC 60118-0 at ear simulator coupler



WARNING

Small parts present a choking hazard.
This device is not suitable for fitting to babies, small children or mentally disabled persons.



WARNING

The maximum output levels of the hearing systems can reach or exceed 132 dB SPL.
Risk of injury to the hearing of the wearer. Ensure that the hearing systems are fitted with care.

For control ranges and more programming features see Hearing Instrument Simulation of Connexx 7.4 and AudioFit 7.4 or higher.